


## Superwool Plus Board



MSDS Aus: Superwool Plus VFB & Shapes

© 2009 Morgan Thermal Ceramics, a business within the Morgan Ceramics Division of The Morgan Crucible Company plc

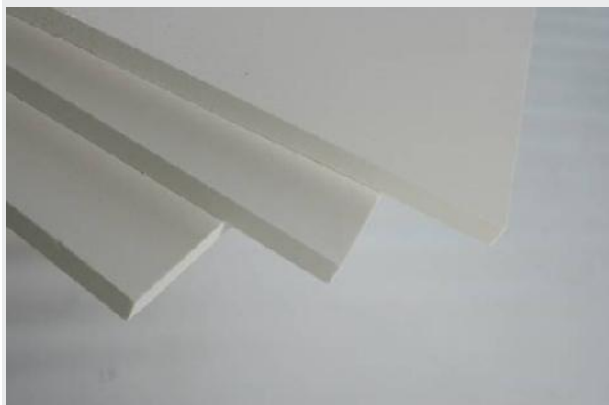

### Description

Vacuum Formed **Superwool Plus Boards** are produced from a blend of low bio-persistent fibres, fillers and binders to give rigid self-supporting forms.

Superwool Plus Boards are not wetted by most molten non-ferrous metals and show good resistance to thermal shock. Each board is finished with smooth edges for squareness and close tolerances.

They are a lightweight and rigid board that can be easily cut and shaped.

**Superwool Plus Boards** are an alternative to ceramic fibre boards in most applications up to their temperature rating.

### FEATURES

- Thin board is easily die-cut and all boards can be cut with a hacksaw blade allowing precise shapes to be made
- Good thermal shock resistance allows use in applications where large variations in temperature occur
- Low heat storage capacity
- Can be used in direct contact with flame
- Very low thermal conductivity
- Exonerated from any carcinogenic classification under Note Q of Safe Work Australia (SWA), Hazardous Substances Information System (HSIS).

### TYPICAL APPLICATIONS

- Thermal shielding and barriers, including splash protection
- Insulation back-up or support lining
- High temperature gaskets
- Combustion chamber, kiln and heater insulation
- Duct lining, including air conditioning ducts

### MATERIAL PACKAGING

- Sheet Size (mm): 1000 x 610
  - Thickness (mm): 6, 10, 13, 25, 40, 50
- Note: Also available in rigidised form

### PHYSICAL PROPERTIES

Classification Temp (°C)	1100
Colour	Off White
Density (kg/m³)	320
Modulus of Rupture (MPa)	1.2
Compressive stress (MPa) At 10% reduction in thickness	0.25
Shrinkage @ 1100°C for 24 hrs	1.6
Loss of Ignition After 2 hrs @ 800°C	7

### THERMAL CONDUCTIVITY

Mean Temp (°C)	W/m.K
400	0.09
600	0.12
800	0.13
1000	0.2

**Morgan Thermal Ceramics**  
10 – 14 Toogood Avenue  
Beverley SA 5009, Australia  
P: +61 (8) 8243 5300  
F +61 (8) 8243 0571



ISO 9001:2008

The values given herein are typical values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Therefore, the data contained herein should not be used for specification purposes. Check with your Morgan Thermal Ceramics office to obtain current information.